




DL01-5 Lighting Remote Control

We make propose of protect environments and save energy. To make your life more convenient and more comfortable. Welcome to choose our products.

—. Operating Introductions

1. Each remote can connect 2 lighting load, used for any kinds of lamps such as energy saving lamp, fluorescent lamp, LED lamp, etc.
2. The channels A and B connect two lamps separately, thereinto, A channel in the condition of turning on (lamp lighting) in order to make it work normally after power off, and also can operate the former wall switches.
3. We match the remote and controller before delivery. If you use a new remote, you need making ID matching(get learning). First choose the channel in the remote, press button D, watching LED indicator, and then press the learning button in the controller, LED lighting. Press any buttons in the remote, LED will flash 3 times and success learning. Then LED lighting to wait another remote learning. LED will power off if it didn't get any signals in several minutes.
4. RCX69 remote can control 5 DL01 controller. A, B button operate A, B lamp power on, C button trun off all the lamps. When operate, pls make sure the right way of the channels.
5. You can choose 5 channels operate all the lamps on or off with remotes.;

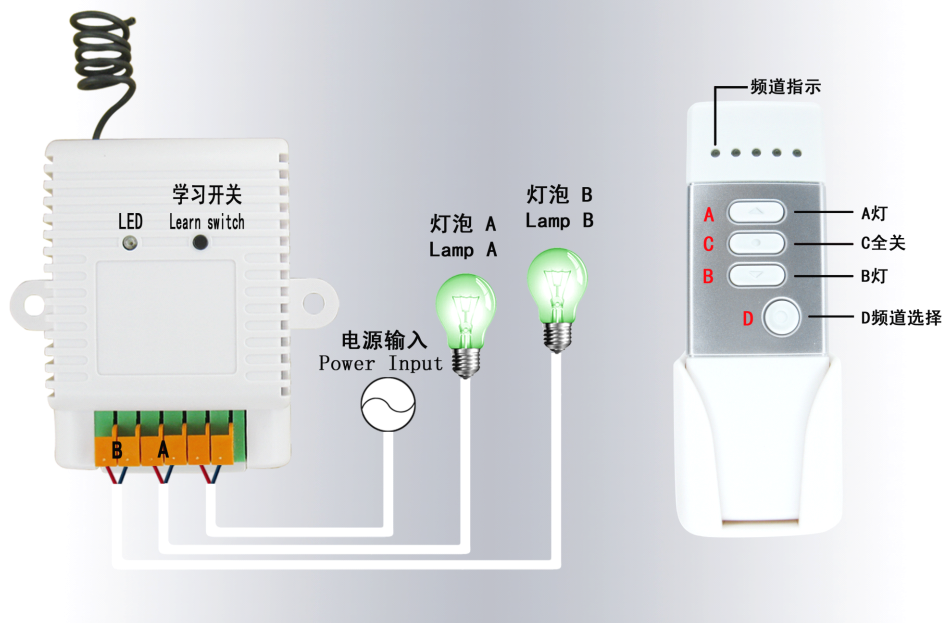

二. Main Technical Parameters

Controller: DL01

Working voltage V A C	Quiescent dissipation nW	Receiving sensitivity d B m	Load power W	Frequency MH z	Tempreture °C	Weight g
1 0 0 ~ 2 4 0	≤ 0 . 5	- 1 0 5	5 0 0	4 3 3 . 9 2	- 1 0 ~ 6 0	7 8

Remote: RC69A

Working voltage V D C	Transmitter power m W	Battery type	Current m A	Frequency MH z	Tempreture °C	Weight g
1 2	≤ 5	2 7 A	≤ 1 0	4 3 3 . 9 2	- 1 0 ~ 6 0	2 7

三. Attention

- 1 . Must cut off the power when installing, or it will do harm to human.
- 2 . Straighten the controller antenna, or it will effect the remote distance.
- 3 . Put controller far from the lamps, the heat of the lamps will harm to the controller.
- 4 . No striking and Trowing.
- 5 . Change the battery when the LED getting dark.

四. Accessory

- | | |
|--------------------|----------|
| 1. Manual | |
| 2. DL01 controller | 5 units |
| 3. RC69 remote | 2 units |
| 4. 3M rubber | 5 pieces |